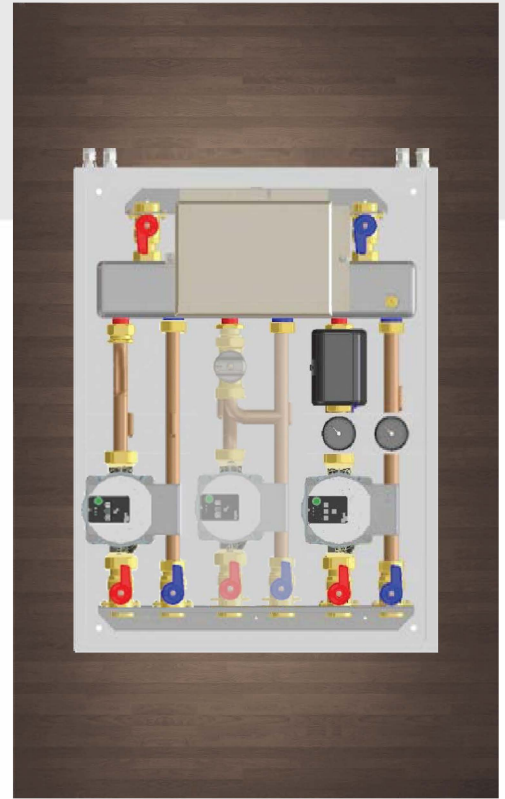




## MULTI-ZONE HYDRAULIC SEPARATOR

### SIM WP 2Z

typ 1 LTT.1HT.YP  
typ 1 LTE.1HT.YP  
typ 2 LTE.1HT.YP

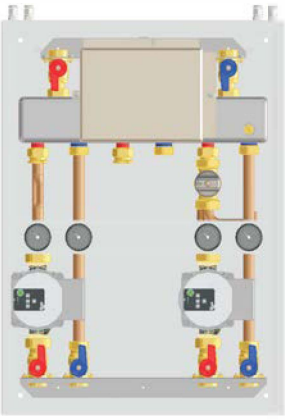
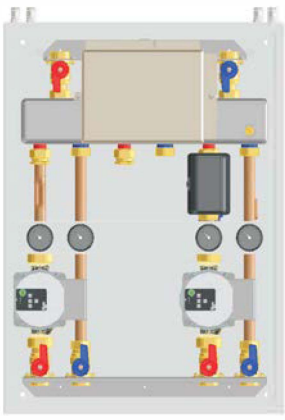
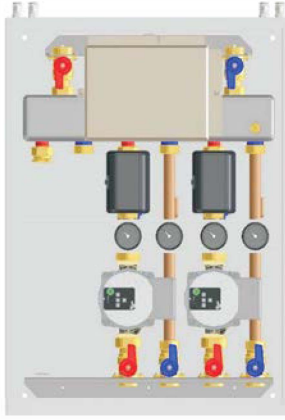




## TECHNICAL FEATURES

- **simple solution** for connecting two or three heating zones
- three models available
- mixing via **thermostatic or electric mixing valve** (depending on the multi-zone separator model)
- **energy-efficient circulation pumps** for each zone
- automatic air-vent
- functionality - factory-fitted components: hydraulic coupling, mixing valve, fittings
- controller enabling cooperation with boiler
- **cooperates with all Termet boilers** (with power up to 35 kW) both standard and condensing

## COOPERATES WITH ALL TERMET BOILERS (WITH POWER UP TO 35kW)

MULTI-ZONE HYDRAULIC SEPARATOR 19

SIM WP 2Z TYP 1LTT.1HT.YP	SIM WP 2Z TYP 1LTE.1HT.YP	SIM WP 2Z TYP 2LTE.1HT.YP			
					
<b>BASIC EQUIPMENT</b>					
<ul style="list-style-type: none"> <li>• 1x hydraulic coupling for 3 heating circuits</li> <li>• <b>1x thermostatic mixing valve</b></li> <li>• 2x energy-saving circulating pump</li> <li>• 1x controller</li> </ul>	<ul style="list-style-type: none"> <li>• 1x hydraulic coupling for 3 heating circuits</li> <li>• <b>1x electric mixing valve</b></li> <li>• 2x energy-saving circulating pump</li> <li>• 1x controller</li> </ul>	<ul style="list-style-type: none"> <li>• 1x hydraulic coupling for 3 heating circuits</li> <li>• <b>2x electric mixing valve</b></li> <li>• 2x energy-saving circulating pump</li> <li>• 1x controller</li> </ul>			
<b>DESCRIPTION</b>					
<p>Two heating circuits can be connected:</p> <ul style="list-style-type: none"> <li>• high-temperature zone (radiator heating)</li> <li>• low-temperature zone (underfloor heating)</li> <li>• 3rd circuit (optional)</li> </ul>	<p>Two heating circuits can be connected:</p> <ul style="list-style-type: none"> <li>• high-temperature zone (radiator heating)</li> <li>• low-temperature zone (underfloor heating)</li> <li>• 3rd circuit (optional)</li> </ul>	<p>Two heating circuits can be connected:</p> <ul style="list-style-type: none"> <li>• 2x low-temperature zone (underfloor heating)</li> <li>• 3rd circuit (optional)</li> </ul>			
<b>KITS FOR SEPARATOR'S EXTENSION</b>					
<p><b>High-temperature connection kit 1HT.YP</b> (with energy-saving circulating pump)</p> 		<p><b>Low-temperature connection kit 1LTT.YP</b> (with thermostatic mixing valve and energy-saving circulating pump)</p> 		<p><b>Low-temperature connection kit 1LTE.YP</b> (with electric mixing valve and energy-saving circulating pump)</p> 